


CryoMag[®]

Three-Axis Magnetic Field Sensor



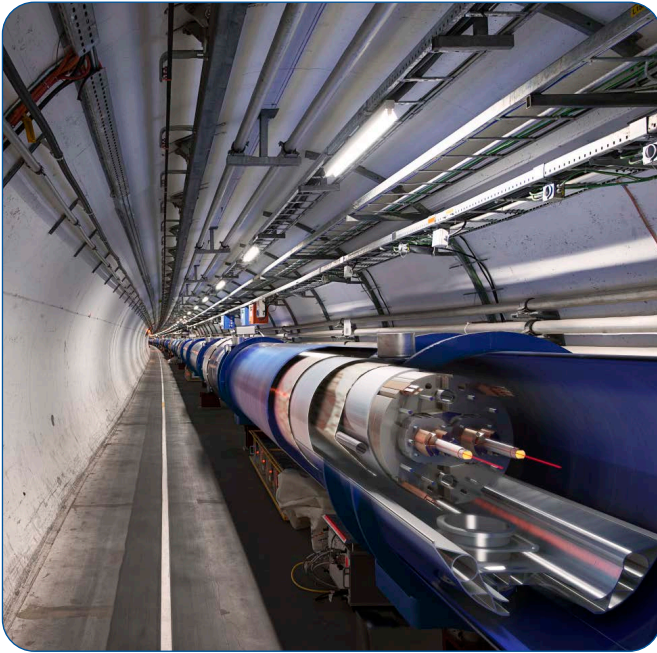

CryoMag® Three-Axis Magnetic Field Sensor

The CryoMag sensor provides high precision measurements of static and alternating magnetic fields.

CryoMag is a two-part Magnetometer that has been adapted to operate at temperatures down to 2-4K, making it ideal for use in cryostats for superconducting radio frequency cavities, in quantum computing applications, and other low temperature environments and applications.



Bartington® is a registered trademark of Bartington Holdings Limited, used under licence in the following countries: Argentina, Australia, Brazil, Canada, Chile, China, European Union, Hong Kong, Iceland, India, Israel, Japan, Malaysia, Mexico, New Zealand, Norway, Republic of Korea, Russian Federation, Singapore, South Africa, Switzerland, Taiwan, Turkey, United Kingdom, United States of America, and Vietnam.

CryoMag® is a registered trademark of Bartington Holdings Limited in the United Kingdom, and United States of America.

Features

- Operating temperature down to 2K
- Noise level down to $<20\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz
- Frequency response from DC to 1kHz
- Measuring ranges of ± 70 , ± 100 , ± 250 and $\pm 500\mu\text{T}$


Typical Applications

- Magnetic field monitoring in cryostats and other low temperature environments
- Use as feedback sensors in active magnetic field cancellation systems

Product Identification

Product Name	Sensor Head Type	Measuring Range
CryoMag	No code = Standard 3-axis Probe	70 = $\pm 70\mu\text{T}$ 100 = $\pm 100\mu\text{T}$ 250 = $\pm 250\mu\text{T}$ 500 = $\pm 500\mu\text{T}$

For example: CryoMag-250 = A $\pm 250\mu\text{T}$ range CryoMag.

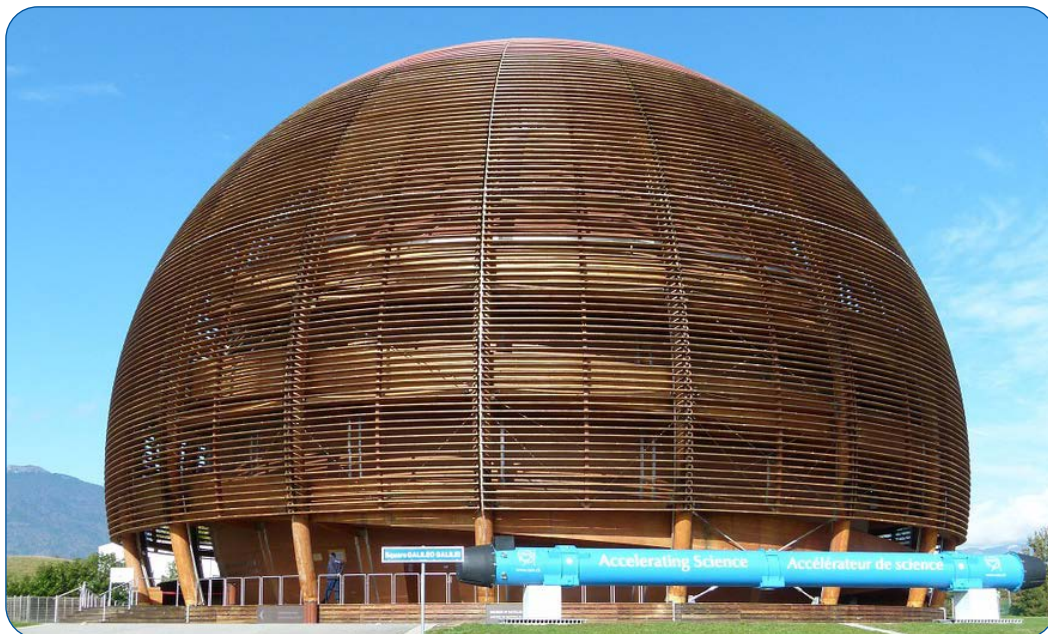

CryoMag Specification

Performance				
Number of axes	Three			
Polarity	+ve when pointing North			
Analogue outputs	±10V single-ended (0V = zero-field)			
Full Scale Measuring Ranges	±70µT	±100µT	±250µT	±500µT
Scaling calibration error	<0.5%			
Scaling Temperature Coefficient	<±100ppm	<±125ppm	<±175ppm	<±200ppm
Linearity error	0.0015% (least squares fit)			
Frequency response	DC to 1kHz (±5%)			
Bandwidth (-3dB)	<2kHz (-11dB/octave roll-off)			
Noise	<20pTrms/√Hz at 1Hz			
Zero field offset	±30nT	±30nT	±60nT	±100nT
Offset Temperature Coefficient	+0.5nT/°C	+0.5nT/°C	+1nT/°C	+1nT/°C
Perming (magnetisation hysteresis)	<2nT at 1x Full-scale, when powered			
Orthogonality error between axes	<±0.1°			
Excitation breakthrough	<5 mV pk-pk at 15.625kHz typical			
Start-up time	<10 seconds			
Warm-up time	<15 minutes to meet specifications for scaling & noise			

Environmental		
Operational temperature range	Probe + probe harness	-271 to +70°C
	Electronics + interconnection block	0 to +70°C (dynamic cable) -40 to +70°C (static cable)
Storage temperature range	-40 to +60°C	
Vacuum	10e-7 Atmosphere (Medium Vacuum)	
IP Rating	Probe + Interconnection Block	IP40
	Electronics Enclosure	IP65 (Unmated Connector)
Humidity - electronics	Up to 90% RH, non-condensing	
Compliance	BS EN 61326-1:2013, WEEE and RoHS II	

Mechanical	
Construction	Two Part
Probe Enclosure Material	PEEK GF30
Probe Dimensions	21mm Diameter x 50mm Long
Probe Harness Material	24-Way Cryogenic Loom Dia 0,1mm Beryllium-Copper (BeCu) Cores; Polyester Insulation 3.5mm Max Loom Diameter (Folded)
Dimensions – Electronics Enclosure	25.4mm Diameter x 220mm Long
Weight	320g
Connectors	Fischer AL-1731-DEU-1031-A010-SR-11-11-G-12
Bartington Helmholtz Jig	Helmholtz Carrier PM4583

Electrical	
Positive supply voltage (range)	+12 to +17V
Current drawn (max. mA)	65mA +3mA/100uT on each axis
Over-voltage protection	Varistor
Reverse polarity protection	Diode – 40V max
Current limit	none
Power Supply Noise Rejection Ratio	5uV/V (105 dB)
Negative supply voltage (range)	-12 to -17V
Current drawn (max. mA)	33 mA +3mA/100uT on each axis
Over-voltage protection	Varistor
Reverse polarity protection	Diode – 40V max
Current limit	none
Power Supply Noise Rejection Ratio	5uV/V (105 dB)
Output Signals X, Y and Z axes	Magnetic field strength
Output Impedance	20 ohms typical
Maximum load capacitance (CLOAD)	<1µF
Maximum cable length	1.5km (but supply must be adequate to achieve ±12V at Magnetometer)
Over-voltage protection	Varistor
Reverse polarity protection	none
Current limit	protected against short circuit to 0V

Cable	
Interconnect Cable	Mag-13MS/MC Cable PM3377

Bartington Instruments Ltd

5, 8, 10, 11 & 12 Thorney Leys Business Park
Witney, Oxford, OX28 4GE. England



Telephone: +44 (0)1993 706565

Email: sales@bartington.com

Website: www.bartington.com

The specifications of the products described in this brochure are subject to change without prior notice.