

Shipped in packet-tape reel(5,000pcs per reel)

Notice: It is requested to read and accept "IMPORTANT NOTICE" written on the back of the front cover of this catalogue.

● Absolute Maximum Ratings(T_a=25°C)

Item	Symbol	Limit	Unit	
Max. Input Voltage	V _c	10	V	
Max.Input Power	P _D	150	mW	
Operating Temp. Range	Topr.	−40 ~ +125	°C	
Storage Temp. Range	Tstg.	−40 ~ +150	°C	

● Electrical Characteristics(T_a=25°C)

Item	Symbol	Conditions	Min.	Тур.	Max.	Unit		
Output Hall Voltage	V _H *	B=50mT, V _C =6V	55		75	mV		
Input Resistance	Rin	B=0mT, I_C =0.1mA	650		850	Ω		
Output Resistance	R _{out}	B=0mT, I _C =0.1mA	650		850	Ω		
Offset Voltage	V _{os} (V _u)	B=0mT, V _C =6V	-11		+11	mV		
Temp. Coefficient of V _H	αV _H	B=50mT, I_{C} =5mA Ta=25 \sim 125 $^{\circ}$ C			-0.06	%/C		
Temp. Coefficient of Rin	αRin	B=0mT, I _C =0.1mA Ta=25~125°C			0.3	%/C		
Linearity	ΔK	B=0.1/0.5T, I _C =5mA			2	%		

Notes : 1. $V_H = VHM - V_{os}(V_u)$ (VHM:meter indication)

$$\begin{array}{l} 2. \ \alpha V_{H} = \frac{1}{V_{H}\left(T_{1}\right)} \ X \ \frac{V_{H}\left(T_{2}\right) - V_{H}\left(T_{1}\right)}{\left(T_{2} - T_{1}\right)} \ X \ 100 \\ 3. \ \alpha R_{in} = \frac{1}{R_{in}\left(T_{1}\right)} \ X \ \frac{R_{in}\left(T_{2}\right) - R_{in}\left(T_{1}\right)}{\left(T_{2} - T_{1}\right)} \ X \ 100 \end{array}$$

3.
$$\alpha R_{in} = \frac{1}{R_{in}(T_1)} X \frac{R_{in}(T_2) - R_{in}(T_1)}{(T_2 - T_1)} X 100$$

4.
$$\Delta K = \frac{K_{in}(T_1) \cdot K(B_2)}{[K(B_1) + K(B_2)]/2} \times 100$$


$$T_1 = 25^{\circ}C, T_2 = 125^{\circ}C$$

$$\mathsf{K} = \frac{\mathsf{V}_\mathsf{H}}{\mathsf{I}_\mathsf{C} \bullet \mathsf{B}}$$

 $B_1 = 0.5T$, $B_2 = 0.1T$


Characteristic Curves

Allowable Package Power Dissipation






●Dimensional Drawing (Unit: mm)




●Land pattern (for reference only) (Unit : mm)





Certain applications using semiconductor devices may involve potential risks of personal injury, property damage, or loss of life. In order to minimize these risks, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards. Inclusion of our products in such applications is understood to be fully at the risk of the customer using our devices or systems.


- •Handling precautions required for preventing electrostatic discharge
- •This product contains galium arsenide (GaAs) .Handling and discarding precautions required.


Characteristic Curves






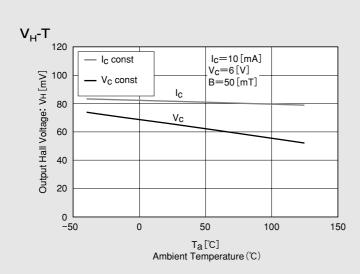







$$\begin{split} R_{In} = & 750 \, (\Omega) \, , V_{OS} = & 4.6 \, (\text{mV}) \, \left[\text{Vc=6 (V)} \right] \\ \text{In This Example} : & R_{In} = & 750 \, (\Omega) \, , \, V_{OS} = & 4.6 \, (\text{mV}) \, , \left[\text{V}_{C} = 6 \, (\text{V}) \right] \end{split}$$

AKM reserves the right to revise the specifications without notice.

b

С

g

i

k

IMPORTANT NOTICE -

- These products and their specifications are subject to change without notice. When you consider any use or application of these products, please make inquiries the sales office of Asahi Kasei Microdevices Corporation (AKM) or authorized distributors as to current status of the products.
- Descriptions of external circuits, application circuits, software and other related information contained in this document are provided only to illustrate the operation and application examples of the semiconductor products. You are fully responsible for the incorporation of these external circuits, application circuits, software and other related information in the design of your equipments. AKM assumes no responsibility for any losses incurred by you or third parties arising from the use of these information herein. AKM assumes no liability for infringement of any patent, intellectual property, or other rights in the application or use of such information contained herein.
- Any export of these products, or devices or systems containing them, may require an export license or other official approval under the law and regulations of the country of export pertaining to customs and tariffs, currency exchange, or strategic materials.
- AKM products are neither intended nor authorized for use as critical components_{Note1)} in any safety, life support, or other hazard related device or system_{Note2)}, and AKM assumes no responsibility for such use, except for the use approved with the express written consent by Representative Director of AKM. As used here:

Note1) A critical component is one whose failure to function or perform may reasonably be expected to result, whether directly or indirectly, in the loss of the safety or effectiveness of the device or system containing it, and which must therefore meet very high standards of performance and reliability

Note2) A hazard related device or system is one designed or intended for life support or maintenance of safety or for applications in medicine, aerospace, nuclear energy, or other fields, in which its failure to function or perform may reasonably be expected to result in loss of life or in significant injury or damage to person or property.

It is the responsibility of the buyer or distributor of AKM products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the above content and conditions, and the buyer or distributor agrees to assume any and all responsibility and liability for and hold AKM harmless from any and all claims arising from the use of said product in the absence of such notification.